NOT JUST LEAK DETECTION! Spill-STOP LEAK CONTAINMENT

Prevent costly & hazardous spills caused by pump diaphragm failure



LEAK CONTAINMENT

The Spill-STOP's patented design safely captures leaked product while effectively shutting down failing pumps. Optional warning alarm and backup pump switchover further ensures maximum productivity and minimal system downtime.



U.S. Patent #5,501,577 Eliminate Costly Downtime & EPA Reporting

USE A Spill-STOP TO:

- Prevent hazardous & costly spills due to failed diaphragms
- Eliminate the loss of product
- Minimize costly system downtime
- Avoid costly EPA reporting
- Reduce dangerous airborne materials that are expelled from pump exhaust

Spill-STOP FEATURES:

- Compatible with all AODD pumps with discharge sizes from 1/4" (6.35mm) to 4" (101.6mm)
- All pneumatic no hazardous electronics or unreliable batteries used
- Warning alarm and automatic backup pump switchover options available
- Bodies available in a full range of chemically resistant materials

(800) 603-7867 www.Blacoh.com
















Spill-STOP LEAK CONTAINMENT SYSTEM

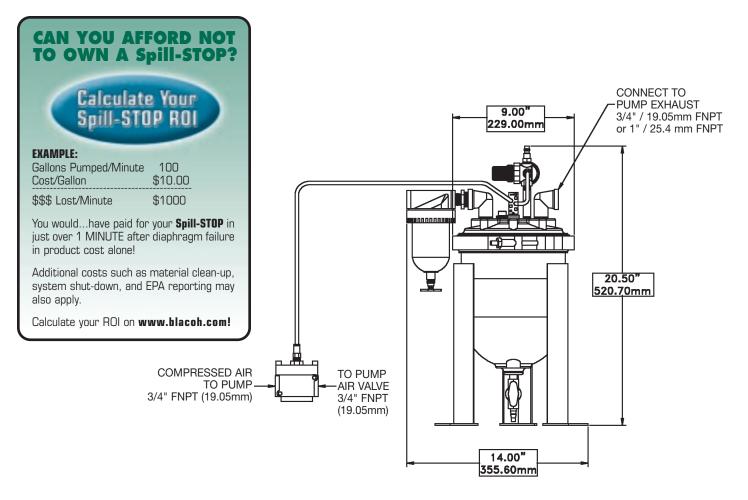

For AODD 1/4"- 2" (3/4"/19.05 mm Inlet)	For AODD 3"- 4" (1"/25.4mm Inlet)	Housing Material	Float Material
SPS-10	SPS-10-3	Polypropylene	Polypropylene
SPS-20	SPS-20-3	316L Stainless	316L Stainless
SPS-30	SPS-30-3	PVDF	316L Stainless
SPS-40	SPS-40-3	Acetal	316L Stainless

AVAILABLE CUSTOM MATERIALS INCLUDE: PVDF & PTFE Coatings

Hastelloy C & Alloy 20 Body Materials All PTFE Units

Please call your local distributor:



Demonstration CD

FLUID CONTROL

 601 Columbia Ave., Bldg. D, Riverside, CA 92507 • USA

 Tel: (800) 603-7867 or (951) 342-3100
 • Fax: (951) 342-3101

 E-mail: sales@blacoh.com
 • Website: www.blacoh.com